

Global packaging machine specialists

WOLF manufacture and configure bespoke vertical and horizontal packaging machines, dosing systems, complementary components and systems tailored to each application and given situation. We are working with our customers every step of the way from the day of making contact until the day the equipment will be installed. Our experts also offer guidance on secondary packaging and line configurations and with a dedicated service team we make sure that our machines always perform at their very best.

Discover WOLF's extensive portfolio of packaging and processing solutions:

Vertical and horizontal form fill seal machines



Dosing systems



Cartoning machines



Engineered with decades of technical know-how and industry experience to offer solutions that suit every packaging requirement. Contact our experts to discuss the VPC range.

8 Bartley Green Business Centre
Kettles Wood Drive, Woodgate
Birmingham B32 3DB

T: 0121 421 1962
E: info@wolf-packaging.co.uk

Find us on social media:

Wolf Packaging UK
 Wolf Packaging UK Ltd
 @PackagingWolf

www.wolf-packaging.co.uk



VPC RANGE



Enhance your production line with WOLF's VPC RANGE of vertical form fill seal machines

WOLF VPC Range of form fill seal machines provide high performance packaging for most products including powders, and also offers a Liquidmaster machine, designed to pack liquids and solids with sauces. They all deliver a compelling price/performance ratio.

Product handling is gentle and functionally efficient for an economical packaging process. Precision and reliability are assured from the wrapping material infeed, through bag shaping and seam sealing, up to the filling.

VPC packaging machines use programmable logic controllers (PLCs) with servo drives for movement and feed functions, making them almost completely wear free and are therefore, very low maintenance.




-  Continuous or intermittent operating mode
-  Suitable for all heat-sealable wrapping materials
-  Suitable for pillow, gusseted, stand-up and chain bags
-  Also suitable for 4-side sealed stand-up bags in Doy style pouches




Delivering high productivity for food and non-food products from a small footprint.

	VPC 250 HS	VPC 400 HS
Machine height	1955 mm	2200 mm
Machine width	1320 mm	1550 mm
Machine depth	2380 mm	2540 mm
Bag width	50–250 mm	70–410 mm
Bag length	80–450 mm	80–700 mm
Filling volume	6000 cm ³	20000 cm ³
Film reel diameter	600 mm	600 mm
Performance*	up to 150 bags/min	up to 100 bags/min
Air requirements **	40l/min at 6 bar	40l/min at 6 bar
Energy requirement	4.5 kW	4.5 kW
Mains connection	400 V, 3 Ph., N, 50/60 Hz	400 V, 3 Ph., N, 50/60 Hz
Type of protection	IP 54	IP 54
Weight	1000 kg	1200 kg
Colour	RAL 1013/9006/9007	RAL 1013/9006/9007

*depending on product and wrapping material **depending on performance Subject to technical modifications

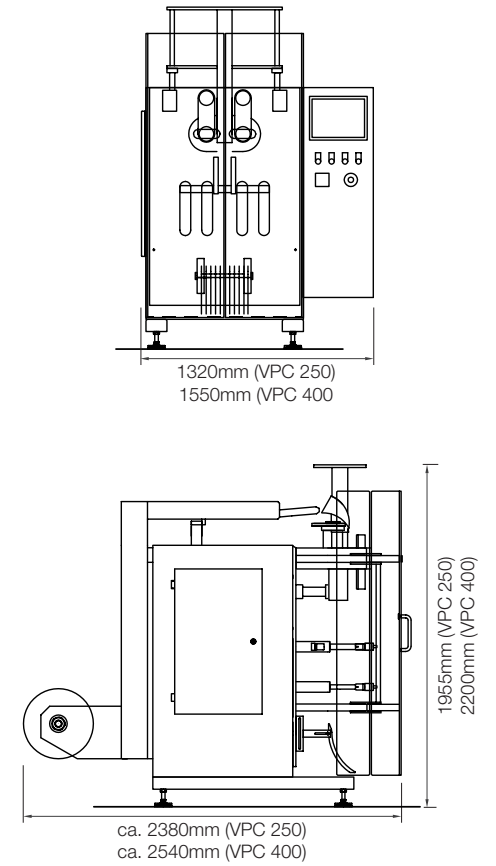

BAG STYLES

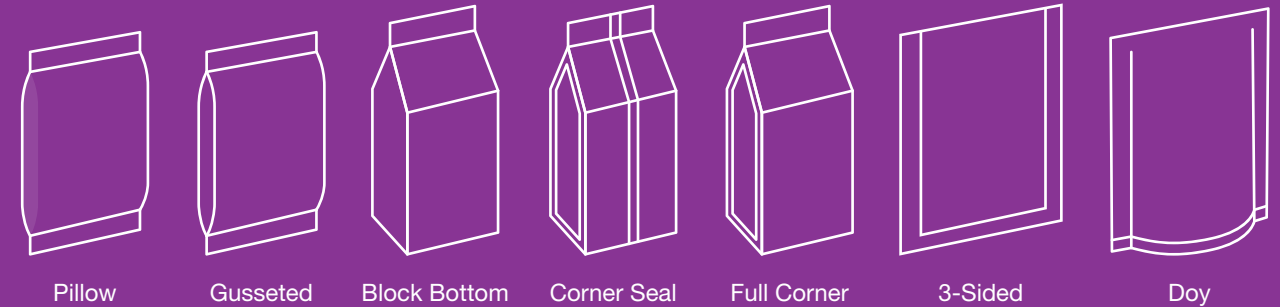

Bag closure options:

- 3-sided with reclosure
- Doy style with reclosure

Easy opening options:

- Tear notch
- Perforation
- Reclosable

Sealing systems:

- Heat
- PE
- Ultrasonic

Control systems:

- Allen Bradley (standard)
- Siemens (optional)

Leaders in technology with more than 3000 installations worldwide.